

Exam Questions NSE7_OTS-6.4

Fortinet NSE 7 - OT Security 6.4

https://www.2passeasy.com/dumps/NSE7_OTS-6.4/



NEW QUESTION 1

An OT administrator has configured FSSO and local firewall authentication. A user who is part of a user group is not prompted for credentials during authentication.

What is a possible reason?

- A. FortiGate determined the user by passive authentication
- B. The user was determined by Security Fabric
- C. Two-factor authentication is not configured with RADIUS authentication method
- D. FortiNAC determined the user by DHCP fingerprint method

Answer: D

NEW QUESTION 2

In a wireless network integration, how does FortiNAC obtain connecting MAC address information?

- A. RADIUS
- B. Link traps
- C. End station traffic monitoring
- D. MAC notification traps

Answer: A

NEW QUESTION 3

An administrator wants to use FortiSoC and SOAR features on a FortiAnalyzer device to detect and block any unauthorized access to FortiGate devices in an OT network.

Which two statements about FortiSoC and SOAR features on FortiAnalyzer are true? (Choose two.)

- A. You must set correct operator in event handler to trigger an event.
- B. You can automate SOC tasks through playbooks.
- C. Each playbook can include multiple triggers.
- D. You cannot use Windows and Linux hosts security events with FortiSoC.

Answer: BC

Explanation:

Ref: <https://docs.fortinet.com/document/fortianalyzer/7.0.0/administration-guide/268882/fortisoc>

NEW QUESTION 4

Refer to the exhibit and analyze the output.

```
[PH_DEV_MON_NET_INTF_UTIL] : [eventSeverity] =PHL_INFO, [filename] =phPerfJob.cpp,
[lineNumber] =6646, [intfName]= Intel [R] PRO_100 MT Network
Connection, [intfAlias] =, [hostname] =WIN2K8DC, [hostIpAddr] = 192.168.69.6,
[pollIntv] =56, [recvBytes64] =
44273, [recvBitsPerSec] = 6324.714286, [inIntfUtil] = 0.000632, [sentBytes64] =
82014, [sentBitsPerSec] = 1171
6.285714, [outIntfUtil] = 0.001172, [recvPkts64] = 449, [sentPkts64] = 255,
[inIntfPktErr] = 0, [inIntfPktErrPct] = 0.000000, [outIntfPktErr] =0,
[outIntfPktErrPct] = 0.000000, [inIntfPktDiscarded] =0, [inIntfPktDiscardedPct] =
```

Which statement about the output is true?

- A. This is a sample of a FortiAnalyzer system interface event log.
- B. This is a sample of an SNMP temperature control event log.
- C. This is a sample of a PAM event type.
- D. This is a sample of FortiGate interface statistics.

Answer: A

NEW QUESTION 5

An OT administrator configured and ran a default application risk and control report in FortiAnalyzer to learn more about the key application crossing the network. However, the report output is empty despite the fact that some related real-time and historical logs are visible in the FortiAnalyzer.

What are two possible reasons why the report output was empty? (Choose two.)

- A. The administrator selected the wrong logs to be indexed in FortiAnalyzer.
- B. The administrator selected the wrong time period for the report.
- C. The administrator selected the wrong devices in the Devices section.
- D. The administrator selected the wrong hcache table for the report.

Answer: BD

NEW QUESTION 6


Which three methods of communication are used by FortiNAC to gather visibility information? (Choose three.)

- A. SNMP
- B. ICMP
- C. API
- D. RADIUS
- E. TACACS

Answer: ACD

NEW QUESTION 7

Refer to the exhibit.

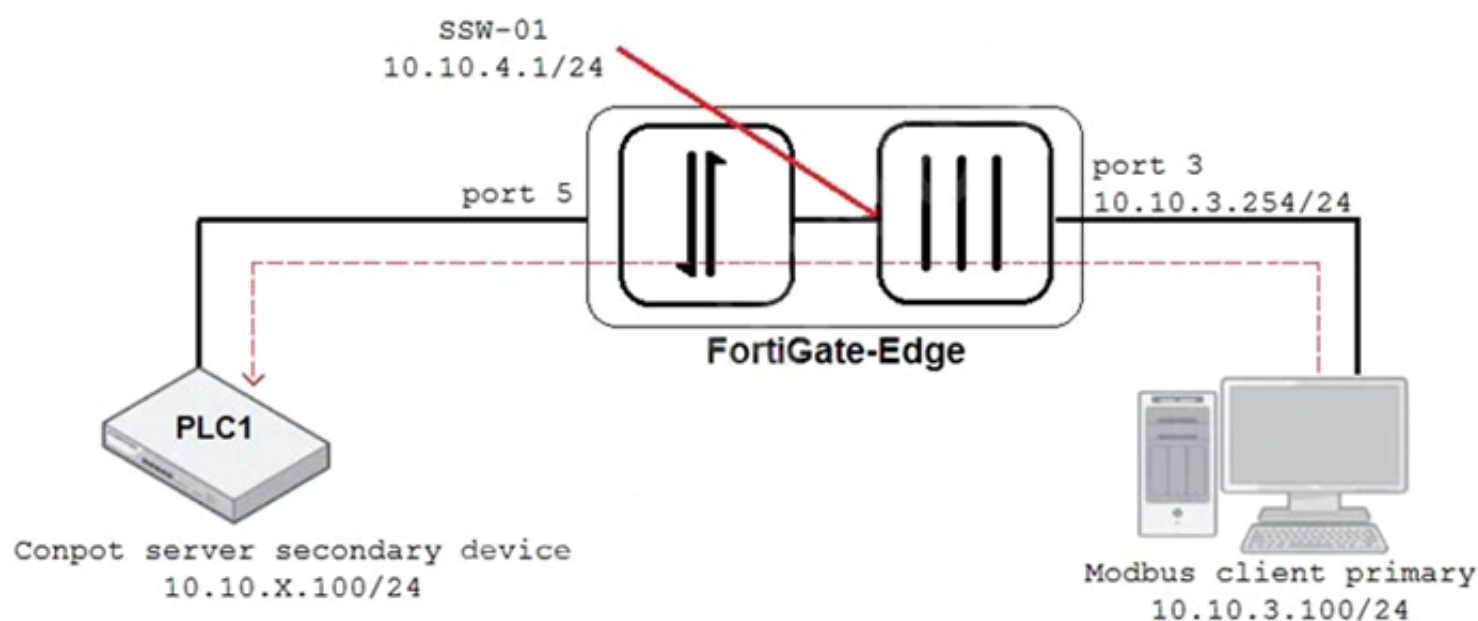

An OT architect has implemented a Modbus TCP with a simulation server Conpot to identify and control the Modbus traffic in the OT network. The FortiGate-Edge device is configured with a software switch interface ssw-01.

Based on the topology shown in the exhibit, which two statements about the successful simulation of traffic between client and server are true? (Choose two.)

- A. The FortiGate-Edge device must be in NAT mode.
- B. NAT is disabled in the FortiGate firewall policy from port3 to ssw-01.
- C. The FortiGate device is in offline IDS mode.
- D. Port5 is not a member of the software switch.

Answer: AC

NEW QUESTION 8


An OT network administrator is trying to implement active authentication. Which two methods should the administrator use to achieve this? (Choose two.)

- A. Two-factor authentication on FortiAuthenticator
- B. Role-based authentication on FortiNAC
- C. FSSO authentication on FortiGate
- D. Local authentication on FortiGate

Answer: AB

NEW QUESTION 9

Refer to the exhibit

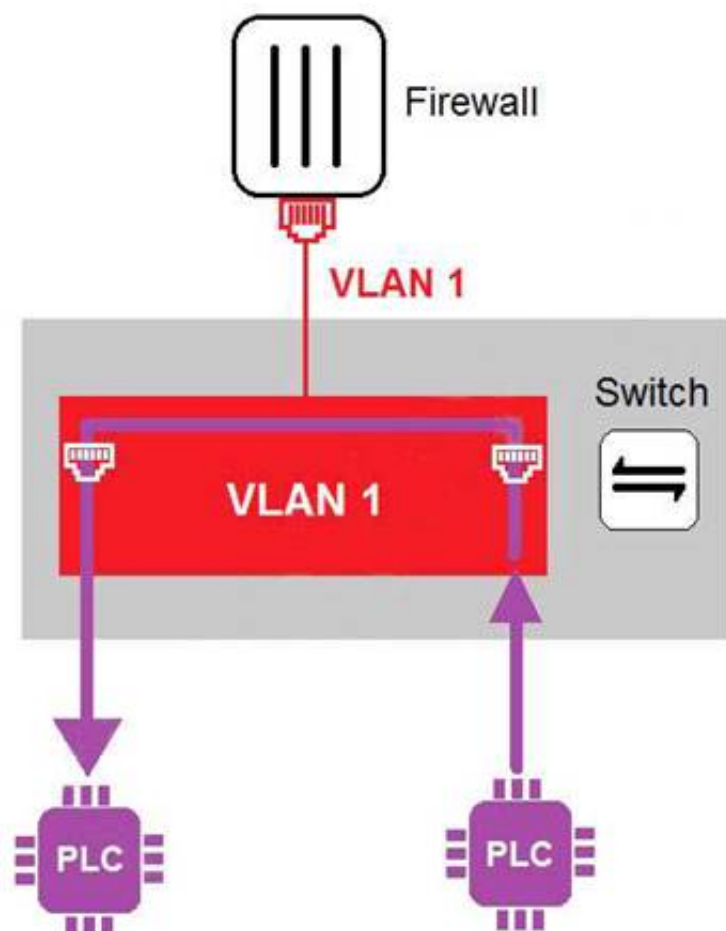

In the topology shown in the exhibit, both PLCs can communicate directly with each other, without going

through the firewall.

Which statement about the topology is true?

- A. PLCs use IEEE802.1Q protocol to communicate each other.
- B. An administrator can create firewall policies in the switch to secure between PLCs.
- C. This integration solution expands VLAN capabilities from Layer 2 to Layer 3.
- D. There is no micro-segmentation in this topology.

Answer: D

NEW QUESTION 10

An OT architect has deployed a Layer 2 switch in the OT network at Level 1 the Purdue model-process control. The purpose of the Layer 2 switch is to segment traffic between PLC1 and PLC2 with two VLANs. All the traffic between PLC1 and PLC2 must first flow through the Layer 2 switch and then through the FortiGate device in the Level 2 supervisory control network.

What statement about the traffic between PLC1 and PLC2 is true?

- A. The Layer 2 switch rewrites VLAN tags before sending traffic to the FortiGate device.
- B. The Layer 2 switches routes any traffic to the FortiGate device through an Ethernet link.
- C. PLC1 and PLC2 traffic must flow through the Layer-2 switch trunk link to the FortiGate device.
- D. In order to communicate, PLC1 must be in the same VLAN as PLC2.

Answer: C

NEW QUESTION 10

When device profiling rules are enabled, which devices connected on the network are evaluated by the device profiling rules?

- A. Known trusted devices, each time they change location
- B. All connected devices, each time they connect
- C. Rogue devices, only when they connect for the first time
- D. Rogue devices, each time they connect

Answer: C

NEW QUESTION 15

Refer to the exhibit.

```
config system interface
    edit VLAN101_dmz
        set forward-domain 101
    next
    edit VLAN101_internal
        set forward-domain 101
    end
```

Given the configurations on the FortiGate, which statement is true?

- A. FortiGate is configured with forward-domains to reduce unnecessary traffic.
- B. FortiGate is configured with forward-domains to forward only domain controller traffic.
- C. FortiGate is configured with forward-domains to forward only company domain website traffic.
- D. FortiGate is configured with forward-domains to filter and drop non-domain controller traffic.

Answer: A

NEW QUESTION 16

What can be assigned using network access control policies?

- A. Layer 3 polling intervals
- B. FortiNAC device polling methods
- C. Logical networks
- D. Profiling rules

Answer: D

NEW QUESTION 19

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual NSE7_OTS-6.4 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the NSE7_OTS-6.4 Product From:

https://www.2passeasy.com/dumps/NSE7_OTS-6.4/

Money Back Guarantee

NSE7_OTS-6.4 Practice Exam Features:

- * NSE7_OTS-6.4 Questions and Answers Updated Frequently
- * NSE7_OTS-6.4 Practice Questions Verified by Expert Senior Certified Staff
- * NSE7_OTS-6.4 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * NSE7_OTS-6.4 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year