

Exam Questions 300-620


Implementing Cisco Application Centric Infrastructure (DCACI)

<https://www.2passeasy.com/dumps/300-620/>




NEW QUESTION 1


An engineer is implementing a Cisco ACI data center network that includes Cisco Nexus 2000 Series 10G fabric extenders. Which physical topology is supported?
 A.

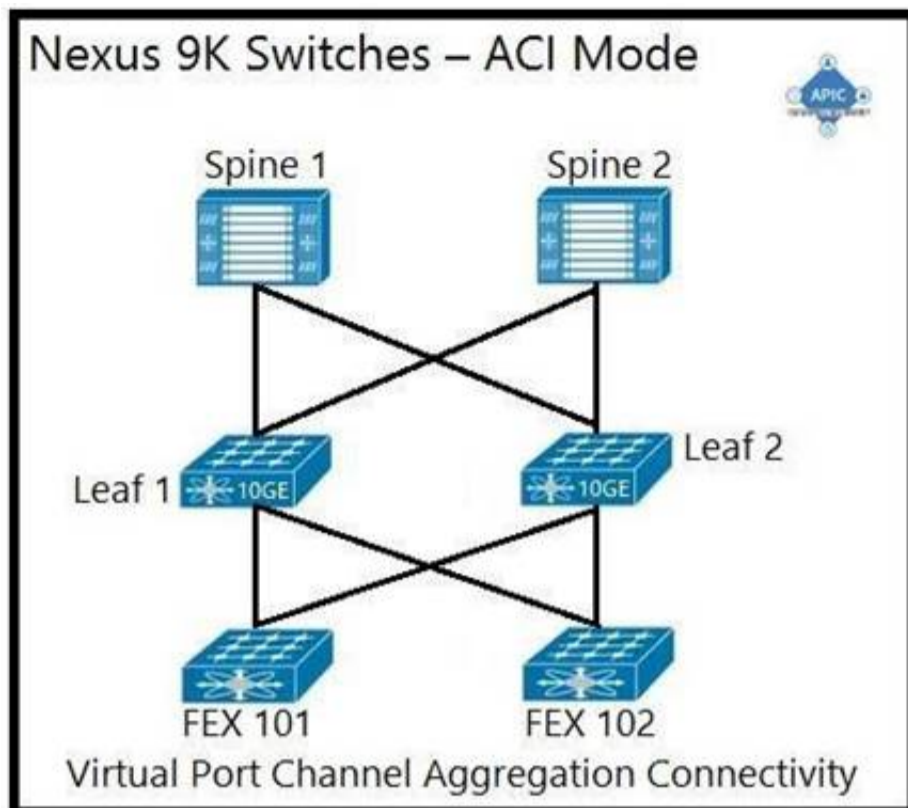


B.

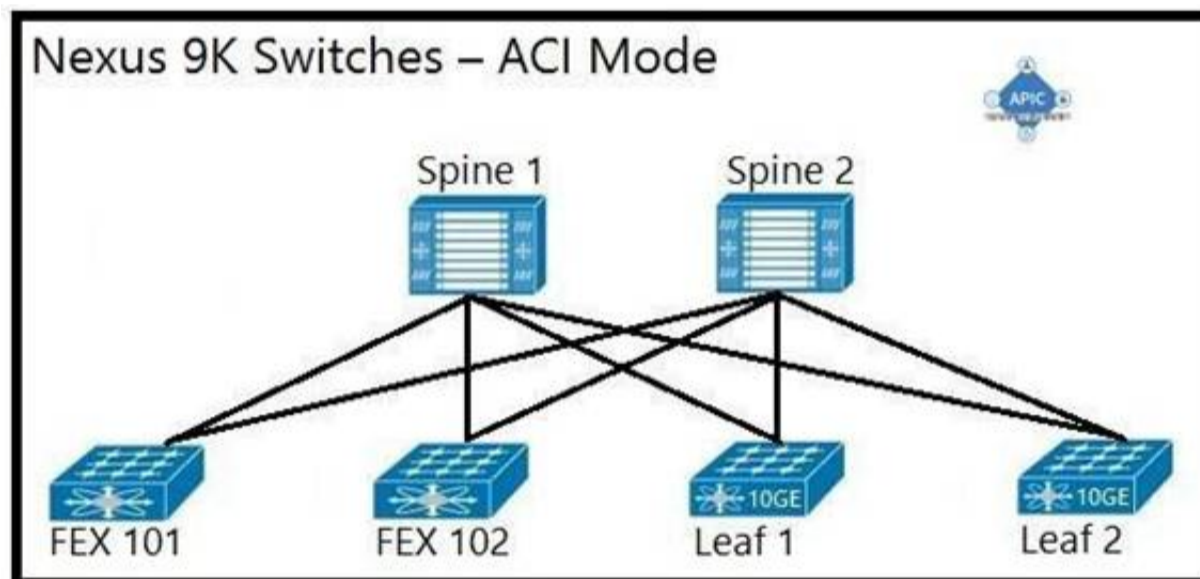

C.

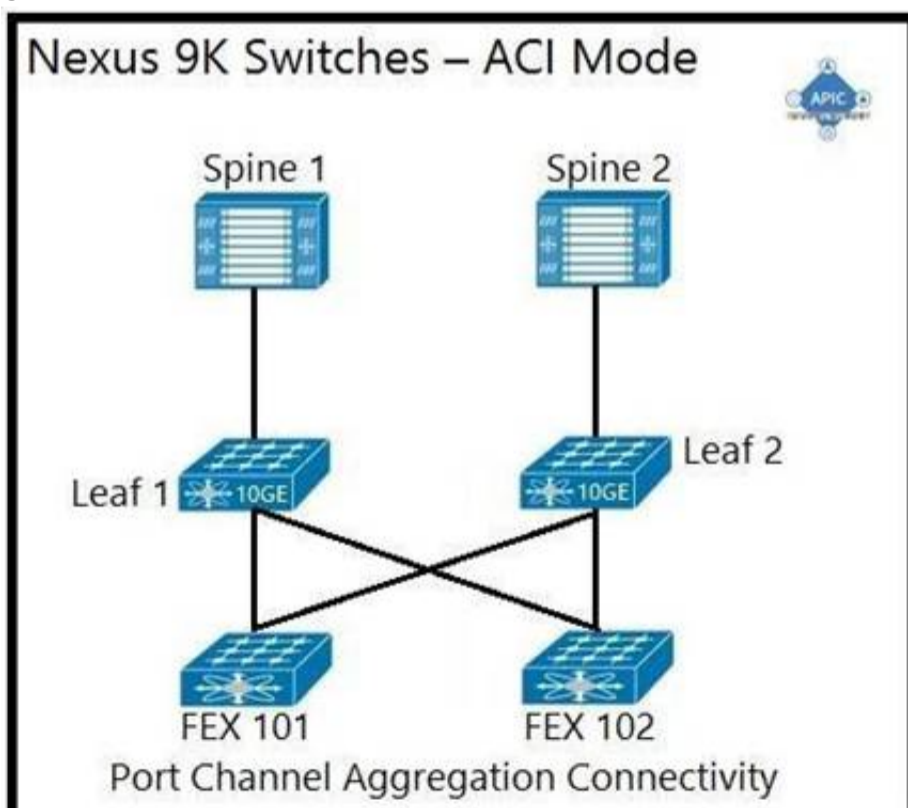

A.

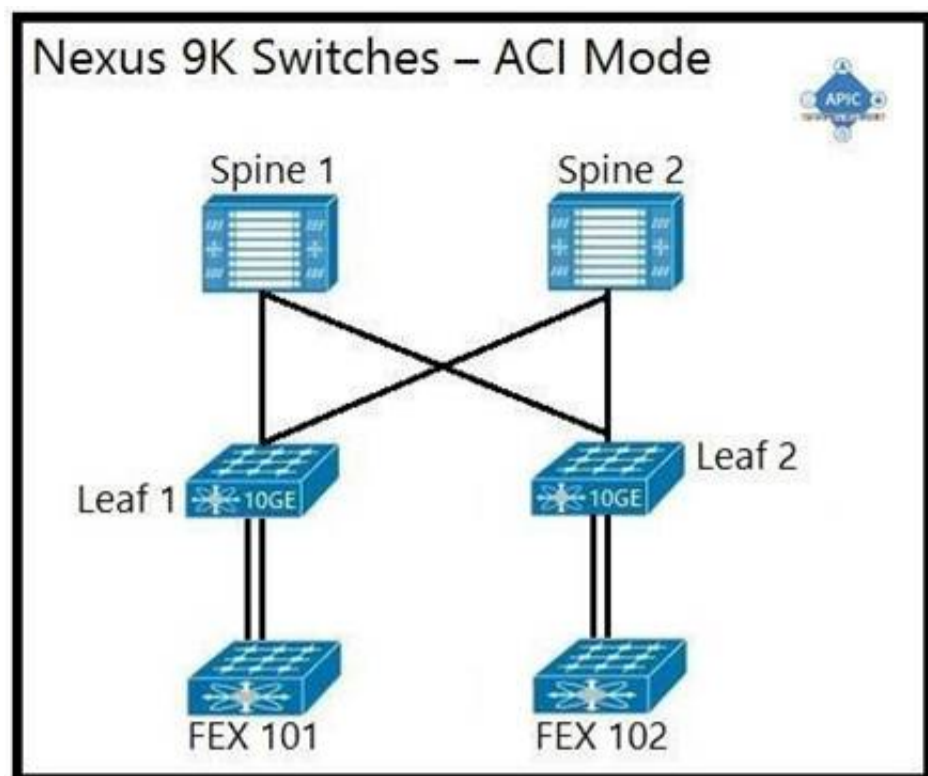

Answer: D

NEW QUESTION 2

An ACI administrator notices a change in the behavior of the fabric. Which action must be taken to determine if a human intervention introduced the change?

- A. Inspect event records in the APIC UI to see all actions performed by users.
- B. Inspect /var/log/audit_messages on the APIC to see a record of all user actions.
- C. Inspect audit logs in the APIC UI to see all user events.
- D. Inspect the output of show command history in the APIC CLI.

Answer: A

NEW QUESTION 3

An engineer is creating a configuration import policy that must terminate if the imported configuration is incompatible with the existing system. Which import mode achieves this result?

- A. merge
- B. atomic
- C. best effort
- D. replace

Answer: B

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/4-x/aci-fundamentals/Cisco-ACI-Fundamentals-401/Cisco-ACI-Fundamentals-401_chapter_01011.html

NEW QUESTION 4

A situation causes a fault to be raised on the APIC. The ACI administrator does not want that fault to be raised because it is not directly relevant to the environment. Which action should the administrator take to prevent the fault from appearing?

- A. Under System -> Faults, right-click on the fault and select Acknowledge Fault so that acknowledged faults will immediately disappear.
- B. Create a stats threshold policy with both rising and falling thresholds defined so that the critical severity threshold matches the squelched threshold.
- C. Under System -> Faults, right-click on the fault and select Ignore Fault to create a fault severity assignment policy that hides the fault.
- D. Create a new global health score policy that ignores specific faults as identified by their unique fault code.

Answer: C

NEW QUESTION 5

A RADIUS user resolves its role via the Cisco AV Pair. What object does the Cisco AV Pair resolve to?

- A. tenant
- B. security domain
- C. primary Cisco APIC
- D. managed object class

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/Security_config/b_Cisco_APIC_Security_Configuration_Guide/b_Cisco_API_C_Security_Guide_chapter_01011.html

NEW QUESTION 6

Which feature dynamically assigns or modifies the EPG association of virtual machines based on their attributes?

- A. vzAny contracts
- B. standard contracts
- C. application EPGs
- D. uSeg EPGs

Answer: D

NEW QUESTION 7

Which feature allows firewall ACLs to be configured automatically when new endpoints are attached to an EPG?

- A. ARP gleaning
- B. dynamic endpoint attach
- C. hardware proxy
- D. network-stitching

Answer: B

NEW QUESTION 8

Which description regarding the initial APIC cluster discovery process is true?

- A. The APIC uses an internal IP address from a pool to communicate with the nodes.
- B. Every switch is assigned a unique AV by the APIC.
- C. The APIC discovers the IP address of the other APIC controllers by using Cisco Discovery Protocol.
- D. The ACI fabric is discovered starting with the spine switches.


Answer: C

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/aci-fundamentals/b_ACI-Fundamentals/b_ACI-Fundamentals_chapter_010011.html

NEW QUESTION 9

Refer to the exhibit.

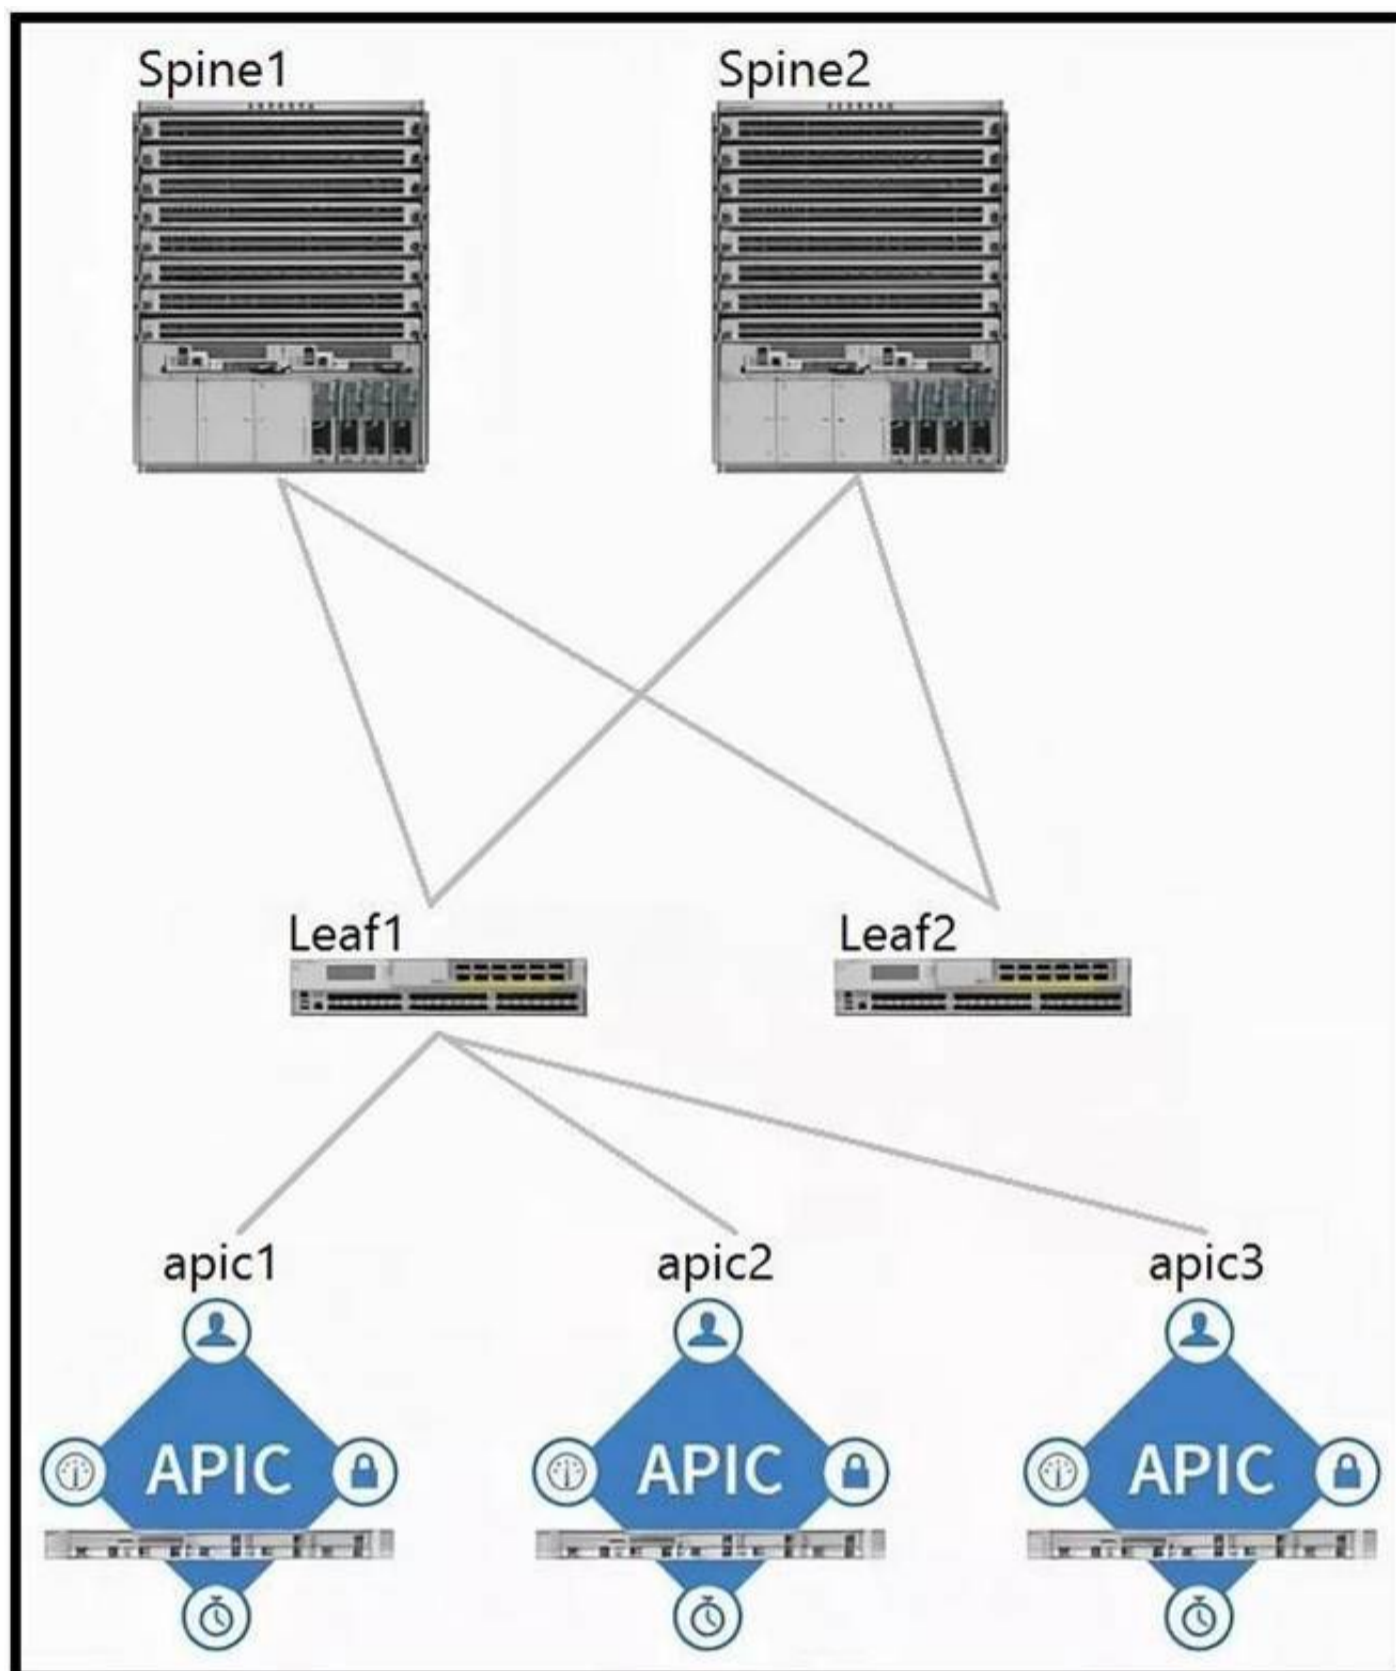

Which two components should be configured as route reflectors in the ACI fabric? (Choose two.)

- A. Spine1
- B. apic1
- C. Spine2
- D. Leaf1
- E. Leaf2
- F. apic2

Answer: AC

NEW QUESTION 10

Which two types of interfaces are supported on border leaf switches to connect to an external router? (Choose two.)

- A. subinterface with VXLAN tagging
- B. subinterface with 802.1Q tagging
- C. FEX host interface
- D. out of band interface
- E. Switch Virtual Interface

Answer: BE

NEW QUESTION 10

Which setting prevents the learning of Endpoint IP addresses whose subnet does not match the bridge domain subnet?

- A. "Limit IP learning to network" setting within the bridge domain.
- B. "Limit IP learning to subnet" setting within the EPG.
- C. "Limit IP learning to network" setting within the EPG.
- D. "Limit IP learning to subnet" setting within the bridge domain.

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_010.html

NEW QUESTION 13

Which endpoint learning operation is completed on the egress leaf switch when traffic is received from an L3Out?

- A. The source MAC and IP address of the traffic is learned as a local endpoint.
- B. The source MAC address of the traffic is learned as a remote endpoint.
- C. No source MAC or IP address of the traffic is learned as a remote endpoint.
- D. The source IP address of the traffic is learned as a remote endpoint.

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739989.html>

NEW QUESTION 16

Refer to the exhibit.

```
<fvTenant name="ACILab">
  <fvCtx name="pvn1"/>
  <fvBD name="bd1">
    <fvRsCtx tnFvCtxName="pvn1"/>
    <fvSubnet ip="10.1.100.1/24"/>
  </fvBD>
</fvTenant>
```

Which two objects are created as a result of the configuration? (Choose two.)

- A. application profile
- B. attachable AEP
- C. bridge domain
- D. endpoint group
- E. VRF

Answer: CE

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/rest_cfg/2_1_x/b_Cisco_APIC_REST_API_Configuration_Guide/b_Cisco_APIC_REST_API_Configuration_Guide_chapter_01110.html

NEW QUESTION 17

Which action sets Layer 2 loop migration in an ACI Fabric with a Layer 2 Out configured?

- A. Enable MCP on the ACI fabric.
- B. Disable STP in the external network.
- C. Disable STP on the ACI fabric.
- D. Enable STP on the ACI fabric.

Answer: A

NEW QUESTION 18

On which two interface types should a user configure storm control to protect against broadcast traffic? (Choose two.)

- A. APIC facing interfaces
- B. port channel on a single leaf switch
- C. all interfaces on the leaf switches in the fabric
- D. endpoint-facing trunk interface
- E. fabric uplink interfaces on the leaf switches

Answer: BD

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_01010.html

NEW QUESTION 23

Which two dynamic routing protocols are supported when using Cisco ACI to connect to an external Layer 3 network? (Choose two.)

- A. iBGP
- B. VXLAN
- C. IS-IS
- D. RIPv2
- E. eBGP

Answer: AE

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/ACI_Best_Practices/b_ACI_Best_Practices/b_ACI_Best_Practices_chapter_010010.html

NEW QUESTION 26

What must be configured to redistribute externally learned OSPF routes within the ACI fabric?

- A. Route Control Profile
- B. BGP Route Reflector
- C. BGP Inter-leak Route Map
- D. PIM Sparse Mode

Answer: B

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/ACI_Best_Practices/b_ACI_Best_Practices/b_ACI_Best_Practices_chapter_010010.html

NEW QUESTION 29

Regarding the MTU value of MP-BGP EVPN control plane packets in Cisco ACI, which statement about communication between spine nodes in different sites is true?

- A. By default, spine nodes generate 9000-bytes packets to exchange endpoints routing informatio
- B. As a result, the Inter-Site network should be able to carry 9000-bytes packets.
- C. By default, spine nodes generate 1500-bytes packets to exchange endpoints routing informatio
- D. As a result, the Inter-Site network should be able to carry 1800-bytes packets.
- E. By default, spine nodes generate 1500-bytes packets to exchange endpoints routing informatio
- F. As a result, the Inter-Site network should be able to carry 1500-bytes packets.
- G. By default, spine nodes generate 9000-bytes packets to exchange endpoints routing informatio
- H. As a result, the Inter-Site network should be able to carry 9100-bytes packets.

Answer: D

NEW QUESTION 32

In the context of VMM, which protocol between ACI leaf and compute hosts ensures that the policies are pushed to the leaf switches for immediate and on demand resolution immediacy?

- A. VXLAN
- B. LLDP
- C. ISIS
- D. STP

Answer: A

Explanation:

Reference:

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/ACI_Best_Practices/b_ACI_Best_Practices/b_ACI_Best_Practices_chapter_0101.html

NEW QUESTION 33

What represents the unique identifier of an ACI object?

- A. universal resource identifier (URI)
- B. application programming interface
- C. management information tree
- D. distinguished name

Answer: D

Explanation:

Reference: <https://www.slideshare.net/CiscoDevNet/introduction-to-aci-apis>

NEW QUESTION 38

Which type of port is used for in-band management within ACI fabric?

- A. spine switch port
- B. APIC console port
- C. leaf access port
- D. management port

Answer: C

NEW QUESTION 43

In the context of ACI Multi-Site, when is the information of an endpoint (MAC/IP) that belongs to site 1 advertised to site 2 using the EVPN control plane?

- A. Endpoint information is not exchanged across sites unless COOP protocol is used.
- B. Endpoint information is not exchanged across sites unless a policy is configured to allow communication across sites.
- C. Endpoint information is exchanged across sites as soon as the endpoint is discovered in one site.
- D. Endpoint information is exchanged across sites when the endpoints are discovered in both sites.

Answer: A

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739609.html#CiscoACIMultiSiteoverlaydataplane>

NEW QUESTION 48

Which two statements regarding ACI Multi-Site are true? (Choose two.)

- A. The Multi-Site orchestrator must be directly attached to one ACI leaf.
- B. Routers in the Inter-Site network must run OSPF, DHCP relay, and MP-BGP.
- C. ACI Multi-Site is a solution that supports a dedicated APIC cluster per site.
- D. ACI Multi-Site is a solution that allows one APIC cluster to manage multiple ACI sites.
- E. The Inter-Site network routers should run OSPF to establish peering with the spines.

Answer: AE

NEW QUESTION 51

What are two requirements for the IPN network when implementing a Multi-Pod ACI fabric? (Choose two.)

- A. EIGRP routing
- B. PIM ASM multicast routing
- C. BGP routing
- D. VLAN ID 4
- E. OSPF routing

Answer: AE

NEW QUESTION 55

A Solutions Architect is asked to design two data centers based on Cisco ACI technology that can extend L2/L3, VXLAN, and network policy across locations. ACI Multi-Pod has been selected. Which two requirements must be considered in this design? (Choose two.)

- A. ACI underlay protocols, i.
- B. COOP, IS-IS and MP-BGP, spans across pod
- C. Create QoS policies to make sure those protocols have higher priority.
- D. A single APIC Cluster is required in a Multi-Pod design
- E. It is important to place the APIC Controllers in different locations in order to maximize redundancy and reliability.
- F. ACI Multi-Pod requires an IP Network supporting PIM-Bidir.
- G. ACI Multi-Pod does not support Firewall Clusters across Pod
- H. Firewall Clusters should always be local.
- I. Multi-Pod requires multiple APIC Controller Clusters, one per pod
- J. Make sure those clusters can communicate to each other through a highly available connection.

Answer: AE

NEW QUESTION 59

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 300-620 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 300-620 Product From:

<https://www.2passeasy.com/dumps/300-620/>

Money Back Guarantee

300-620 Practice Exam Features:

- * 300-620 Questions and Answers Updated Frequently
- * 300-620 Practice Questions Verified by Expert Senior Certified Staff
- * 300-620 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 300-620 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year